

STANDARD POWDER-COATED CASING IN WHITE (RAL 9016)

IMPROVED CASING PROPERTIES
 Best casing values as per DIN EN 1886:
 Thermal insulation: T2
 Thermal bridge factor: TB2
 Mechanical stability D1
 Leakage: L1

		CKL-iH/-iV-1400 EVO	CKL-iH/-iV-2400 EVO	CKL-iH/-iV-3300 EVO
Length*	mm	1525	2033	2033
Depth	mm	750	750	950
Total height	mm	1309 / 1315	1716 / 1720	1716 / 1720
Duct connection dimensions	mm	612x409 / 596x206	612x612 / 596x307	815x612 / 799x307
Weight of basic unit	kg	250	360	450
Nominal flow rate	m ³ /h	1400	2400	3300

*With/without boost damper

		CKL-A-1400 EVO	CKL-A-2400 EVO	CKL-A-3300 EVO
Length**	mm	1525	2033	2033
Depth (incl. roof)	mm	815	815	1017
Total height	mm	1455	1860	1860
Duct connection dimensions	mm	612x409	612x612	815x612
Weight	kg	315	460	555
Nominal flow rate	m ³ /h	1400	2400	3300

*With/without boost damper

**Without hoods

11.19/GB - Subject to modifications

WOLF GmbH
 Postfach 13 80
 84048 Mainburg, Germany
 Tel. +49(0)8751/74-0
 Fax +49(0)8751/74-1600
 www.WOLF.eu
 info@WOLF.eu

PERFECTLY IN TUNE WITH YOU. **WOLF**

WOLF CKL EVO COMPACT VENTILATION UNIT
FAST & PERFECT
FROM PLANNING TO INSTALLATION



PERFECTLY IN TUNE WITH YOU. **WOLF**

THE BENCHMARK FOR
COMPACT UNITS -
NEW AND IMPROVED.

TOP-CLASS PLUG & PLAY

HIGHEST QUALITY AND HYGIENE STANDARDS

ADDITIONAL CONTROL FUNCTIONS

EXTENSIVE ACCESSORIES AVAILABLE

SHORT DELIVERY TIMES




THE BENCHMARK FOR COMPACT UNITS - NEW AND IMPROVED

CKL EVO

EVEN MORE POSSIBILITIES FROM THE INITIAL CONCEPT


The highest quality and hygienic standards, unparalleled compactness combined with intelligent ease of installation - properties that already make the CKL compact device series a success. And the EVOLution begins: With practical, state-of-the-art new features and increased performance values, WOLF has completely revised the product series.

Thanks to the outstanding achievements of our development engineers: Higher air handling rates at the same or smaller appliance dimensions compared with the previous product line.

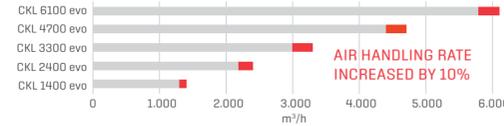

Numerous extension options:

- Expanded integrated control
- Even more accessories
- Increased heating output
- Equipped to satisfy all standards: Double filter and pocket filter module
- Monitoring of the system with simple Smartset access via app and PC

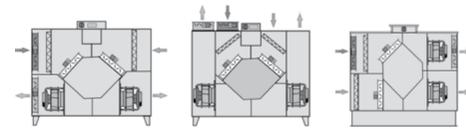

Available with horizontal or vertical duct connection and as outdoor unit

PLANNED IN 5 MINUTES WITH THE 5-MINUTE COMPACT CONFIGURATOR

- Exporting of:
- 2D and 3D drawings
 - Technical data
 - BIM data

Custom-built in 13 business days



DEVELOPED FOR HYGIENIC, EFFICIENT OPERATION AND SIMPLE MAINTENANCE



Hygienic & orderly

Unique: **Cable harness** in the back wall for smooth surfaces in the appliance



Manometer tubing within the door



Double filter stage for maximum hygiene



Maximum efficiency in bypass mode thanks to Ice Protect Technology



Eurovent and RLT certified as standard, VDI 6022 compliant

Simple operation

New **touch control unit** for operating the entirely integrated control




Maximum efficiency

Fans of the **newest generation**

Boost damper

Unique operating modes for the very highest efficiency through clever use of circulating air with the **boost damper**



BY PERFECTIONISTS FOR EXPERTS

THE MOST INSTALLATION-FRIENDLY UNIT ON THE MARKET



Extremely compact dimensions



Unique lengthwise separation for easy transport of the larger CKL 4700 evo and CKL 6100 evo indoor units



Easy lifting makes handling at the construction site child's play



No need to drill holes in outdoor units for running supply lines



Heating - cooling - ventilation in a single package. The Clima Split system is easy to expand and can be installed in just a few steps.

